

Saturna 4002LED Mini Pendant Mount

INTERIOR


MODEL	LED	COLOR TEMPERATURE	VOLT	LENS	DRIVER LOCATION	OPTIONS	COLOUR
4002	1x16L <i>LED module</i> 16 watt	40* <i>4000K</i> 1700 lumens	120*	RF* <i>frost</i>	REM* <i>remote driver</i>	WL <i>wet location label</i> <i>(covered ceilings)</i>	WT <i>white texture</i>
			208		INT <i>integral driver</i>	C86 <i>45° ball aligner</i> <i>hanger</i>	BT <i>black texture</i>
			240			P(_ ") <i>pendant length</i>	SM <i>silver metallic</i>
			277				AN <i>aluminum natural</i>
			347				BZ <i>bronze</i>
							GM <i>gunmetal</i>
							WS <i>white satin</i>
							BM <i>black matte</i>
							RAL <i>specify no.</i>

*Standard configuration unless otherwise specified

SAMPLE CATALOG NUMBER: 4002 - 1x16L - 40 - 120 - RF - REM - P24 - WT

Using this catalog number would order 1 model 4002 pendant mount luminaire with a 16 watt, 4000K, 1700 lumen light engine wired to 120 volts, a remote mounted driver, a frosted globe, a pendant length of 24" and painted with white texture polyester powder coat.

CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p>Materials</p> <p>Luminaire housing: Cast aluminum. Gasket: EPDM rubber. Strut assembly: Aluminum sheet, keyholed removal. Reflector disks: Aluminum sheet. Lens/diffuser: Threaded, 3.4" tempered glass. Stem: Steel tubing with hangstraight swivel. Fasteners: Stainless steel.</p> <p>LED Components</p> <p>Driver: Constant current, 450ma. Light Engine: Chip-on-Board 13mm LED Zhaga Book 3 Compliant Socket</p>	<p>Luminaire is designed to mount over a recessed 4" octagon j-box. Backstrap mounts to the ears of the j-box.</p> <p>The integral driver option provides a driver compartment at the ceiling line. Additional mounting holes are provided to allow mounting independent of the junction box ears if integral driver option is requested. For wet locations luminaire must be restrained from wind action. Special hanger or restraint required. A +/- 5° hangstraight is provided. Optional 45° ball aligner is offered.</p>	<p>Standard threaded frosted globe. Strut and disk assembly shield light source. Top reflector disk controls upward light.</p>	<p>The Saturna mini pendant is listed for use in damp locations to UL and CSA Standards. An optional wet location label can be provided. LED life: 50,000 hours minimum, L70 @ 25°C.</p>

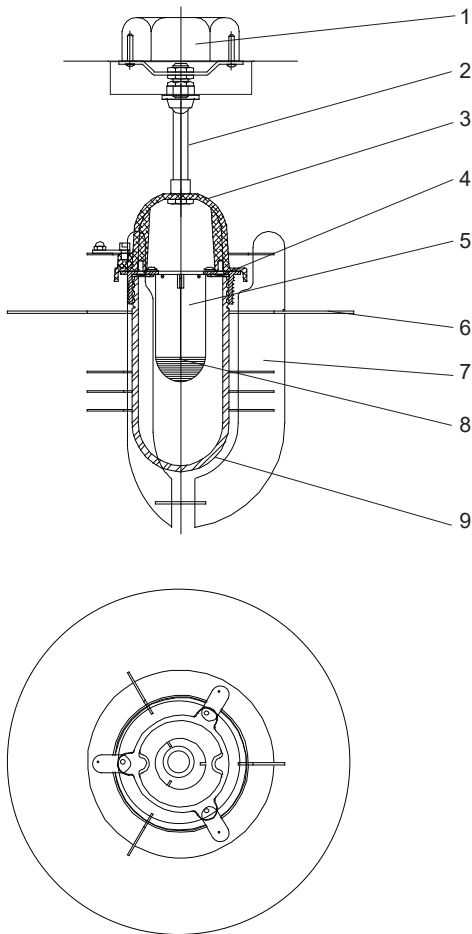


Saturna 4002LED Detailed Product Description

- | | | | |
|---|---|----|---|
| 1 | 4" Recessed Octagon J-Box (By Others) | 7 | Strut Assembly - Keyholed Removal .102" Aluminum |
| 2 | Stem - 1/2" Steel Tubing with Hangstraight Swivel | 8 | Chip-on-Board 13mm LES, Zhaga Book 3 Compliant Socket |
| 3 | Housing - Cast Aluminum | 9 | Lens/Diffuser - Frosted Glass Threaded - Tempered |
| 4 | Gasket - E.P.D.M. Rubber | 10 | Driver (Remote Mounted) 450mA, 120-277 Volt Input |
| 5 | Heatsink | | |
| 6 | Reflector Disks - .102" Aluminum | | |

Saturna 4002LED Mini Pendant Mount

Integral Driver Canopy Detail

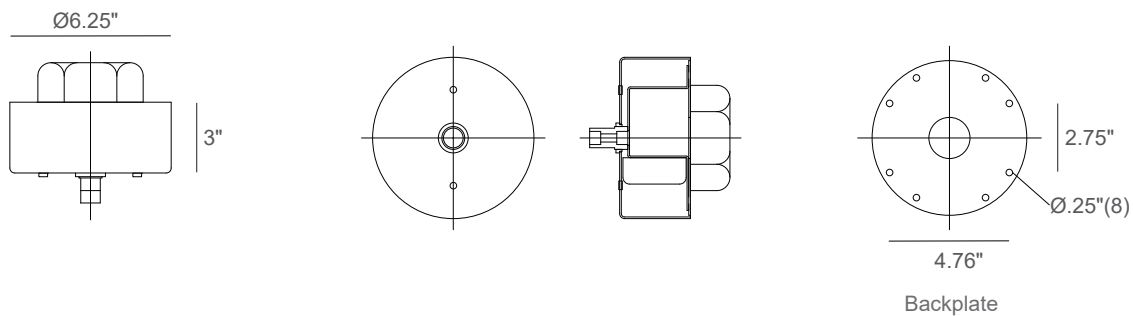

Remote Driver Detail

