

Saturna 4009LED Maxi Landscape Bollard

EXTERIOR

MODEL	LAMP	COLOUR TEMPERATURE	VOLT	DIFFUSER	OPTIONS	COLOUR
4009	25L <i>1 x 25 watts¹ 3532 lumens²</i>	40* 4000K 35 3500K 30 3000K	120* 277	CLR* polycarbonate	BCR base cover - round DIM dimming (0-10 volt) 90 90 CRI	WT white texture BT black texture SM silver metallic AN aluminum natural BZ bronze GM gunmetal WS white satin BM black matte RAL specify no.




*Standard configuration unless otherwise specified

¹Nominal LED Power ²Source lumens

SAMPLE CATALOG NUMBER: 4009 - 25L - 40 - 120 - CLR - WT

Using this catalog number would order 1 model 4009LED maxi bollard with a 25 watt LED light module with a color temperature of 4000K wired to 120 volts, with a clear polycarbonate lens, painted white texture polyester powder coat.

CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p>Materials Top cap: Cast aluminum. Reflector disks / vertical ribs: Machined aluminum plate. Lens / diffuser: .125" clear UV stabilized polycarbonate. Glare guard: Aluminum. Fitter: Die formed aluminum. Post: 5.6" diameter seamless aluminum.</p> <p>Electrical Components Driver: Constant current, 700 mA, 120 - 277 Volt. LED module: Lumileds COB 1208, 80 CRI.</p>	<p>Luminaire is designed to mount to a concrete base (by others). Four anchor bolts are provided in hot dipped galvanized finish. Base plate is welded to bollard shaft. Base cover is offered as an option.</p>	<p>Fully sealed (IP65) silicone optic with 70° beam angle and 93% efficiency.</p>	<p>The Saturna bollard is listed for use in wet locations to UL and CSA Standards. L70 minimum at 50,000 hours @ 25°C ambient.</p>

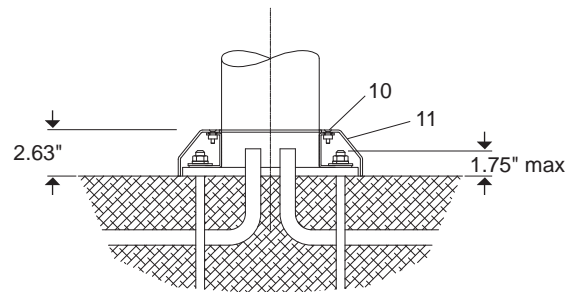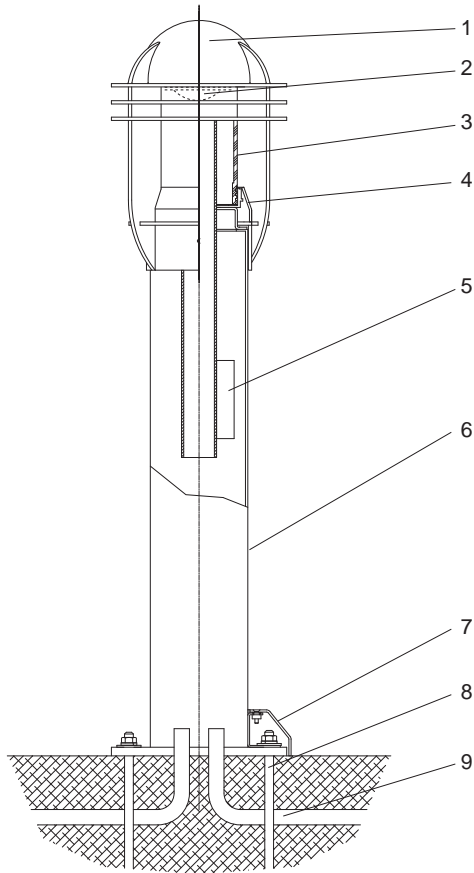

Optional Base Cover Detail

Saturna 4009LED Detailed Product Description

- | | |
|---|---|
| <p>1 Top cap & guard assembly with locking set screws</p> <ul style="list-style-type: none"> • Top cap - cast aluminum - marine grade • Reflector disks - .188" aluminum • Vertical ribs - .375" aluminum <p>2 Luxeon COB 1208 LED with Silicone Optic</p> <p>3 Clear Polycarbonate Cylinder</p> <p>4 Fitter/Holder - aluminum</p> <p>5 Driver - 120 or 277V constant voltage mounted to ground termination bracket.</p> <p>6 Post & Base Assembly</p> <ul style="list-style-type: none"> • Post - seamless aluminum • Base plate - .500" thick • Cast aluminum | <p>7 Optional base cover</p> <p>8 Anchor bolt set</p> <p>4 x .500" Ø x 12" long hot dip galvanized</p> <p>9 Conduits (by others)</p> <p>10 Locking screw</p> <p>11 Ø 10.5" aluminum base cover</p> |
|---|---|