

Saturna 4013LED Maxi Wall Back Mount Sconce

EXTERIOR

MODEL	LED	COLOR TEMPERATURE	VOLT	LENS	OPTIONS	COLOUR
4013	2x16L <i>LED module</i> <i>2 x 16 watt</i>	40* <i>4000K</i> <i>2 x 1700 lumens¹</i>	120* 208 240 277 347	RF* <i>frost</i>	PC <i>button type photocell</i>	WT <i>white texture</i> BT <i>black texture</i> SM <i>silver metallic</i> AN <i>aluminum natural</i> BZ <i>bronze</i> GM <i>gunmetal</i> WS <i>white satin</i> BM <i>black matte</i> RAL <i>specify no.</i>




*Standard configuration unless otherwise specified

¹Delivered lumens each side (4000K, 80CRI)

SAMPLE CATALOG NUMBER: 4013 - 2x16L - 40 - 120 - RF - WT

Using this catalog number would order 1 model 4013 wall back mount sconce with two 16 watt 4000K, 1700 lumen light engines wired to 120 volts, with frosted glass globes and painted with white texture polyester powder coat.

CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p>Materials Ballast housing with lampholder assembly: Heavy gauge aluminum. Gasket: EPDM rubber. Strut and disk assembly: Heavy gauge aluminum. Globe fitter: Die cast aluminum. Lens/diffuser: Threaded, tempered glass. Fasteners: Stainless steel.</p> <p>LED Components Driver: Constant current, 450mA. Light Engine: Chip-on-Board 13mm LES, Zhaga Book 3 Compliant Socket.</p>	<p>Luminaire is designed to mount over a centrally located recessed 4" octagon j-box. Four mounting holes are provided to attach luminaire to the wall. Sealant should be applied across the top of the backplate and down the sides to exclude water entrance. Mounting bracket attaches to the wall and strut/disk assembly hooks on top and is secured with stainless steel set screws.</p>	<p>Luminaire features frosted, tempered glass globes. Strut and disk assembly provides a decorative appearance while providing glare control and light direction.</p>	<p>The Saturna maxi wall sconce is listed for use in wet locations to UL and CSA Standards. LED life: 50,000 hours minimum, L70 @ 25°C.</p>

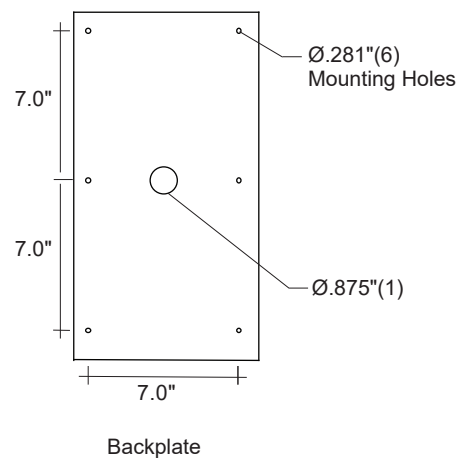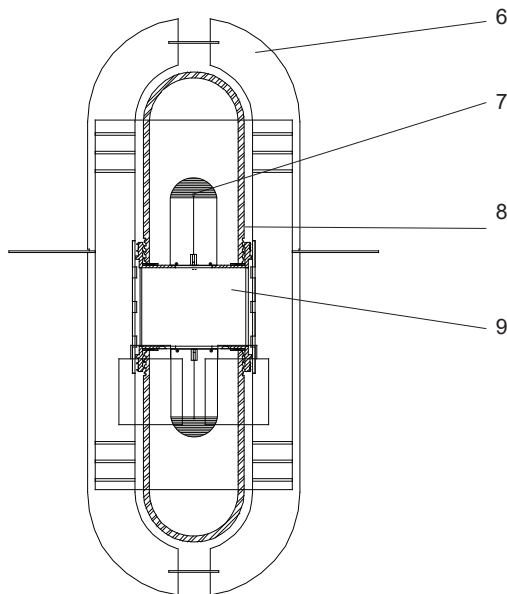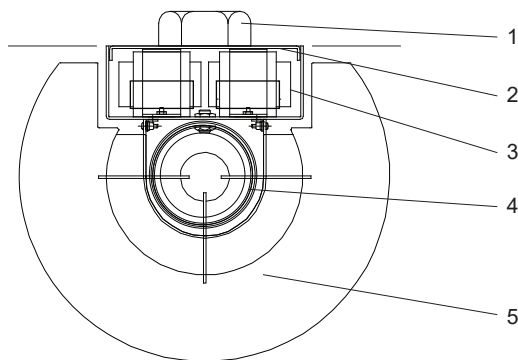

Saturna 4013LED Detailed Product Description

- | | | | |
|---|---|---|--|
| 1 | 4" Recessed Octagon J-Box (By Others)
(Located On Center Line) | 6 | Strut Assembly .125" Aluminum |
| 2 | Mounting Plate .102" Aluminum | 7 | Light Engine - Chip-on-Board 13mm, Zhaga Book 3 Compliant Socket |
| 3 | Drivers, 450mA, 120-277 Volt Input | 8 | Lens/Diffuser - Frosted Glass Threaded - Tempered |
| 4 | Gasket - E.P.D.M. Rubber | 9 | Fitter Assembly .081" Aluminum and Heatsink |
| 5 | Reflector Disks .125" Aluminum | | |