

## Streamline 6030DLED Mini Wall Mount Sconce - Downlight INTERIOR


MODEL	LED	COLOR TEMPERATURE	VOLT	OPTIONS	COLOR
6030D	7L 3 x 2.4w 390 lumens+	30 3000K	120*	WL wet location listing	WT white texture
		35 3500K	277	DIM dimming driver (0-10v)	BT black texture
		40 4000K		DL downlight only (4.8w, 353 lumens)	SM silver metallic
					AN aluminum natural
					BZ bronze
					GM gunmetal
					WS white satin
					BM black matte
					RAL specify no.

\*Standard configuration unless otherwise specified +delivered (353 lumens down/37 lumens up, 4000K)

SAMPLE CATALOG NUMBER: 6030D - 7L - 30 - 120 - WT

Using this catalog number would order 1 model 6030D mini wall mount sconce with 3 x 2.4 watt LED boards with a color temperature of 3000K wired to 120 volts, painted white texture polyester powder coat.

CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p><b>Materials</b> LED housing: Pressure die cast aluminum. Light reveal: Frost acrylic. Lens: Prismatic glass.</p> <p><b>Electrical Components</b> Driver: Constant current 350mA integral driver. LED boards &gt;82CRI.</p>	<p>The 6030D luminaire is designed to mount over a recessed 4" j-box. A universal mounting plate allows leveling. The unit attaches to a mounting plate that is fixed to the j-box. Two stainless steel set screws lock the luminaire to the mounting plate.</p>	<p>The 6030D luminaire is designed to provide even downlight illumination and soft illumination of the uplight reveal strip.</p>	<p>The 6030D luminaire is listed for use damp/dry locations to UL and CSA standards. ADA compliant. An optional wet location label can be provided.</p>

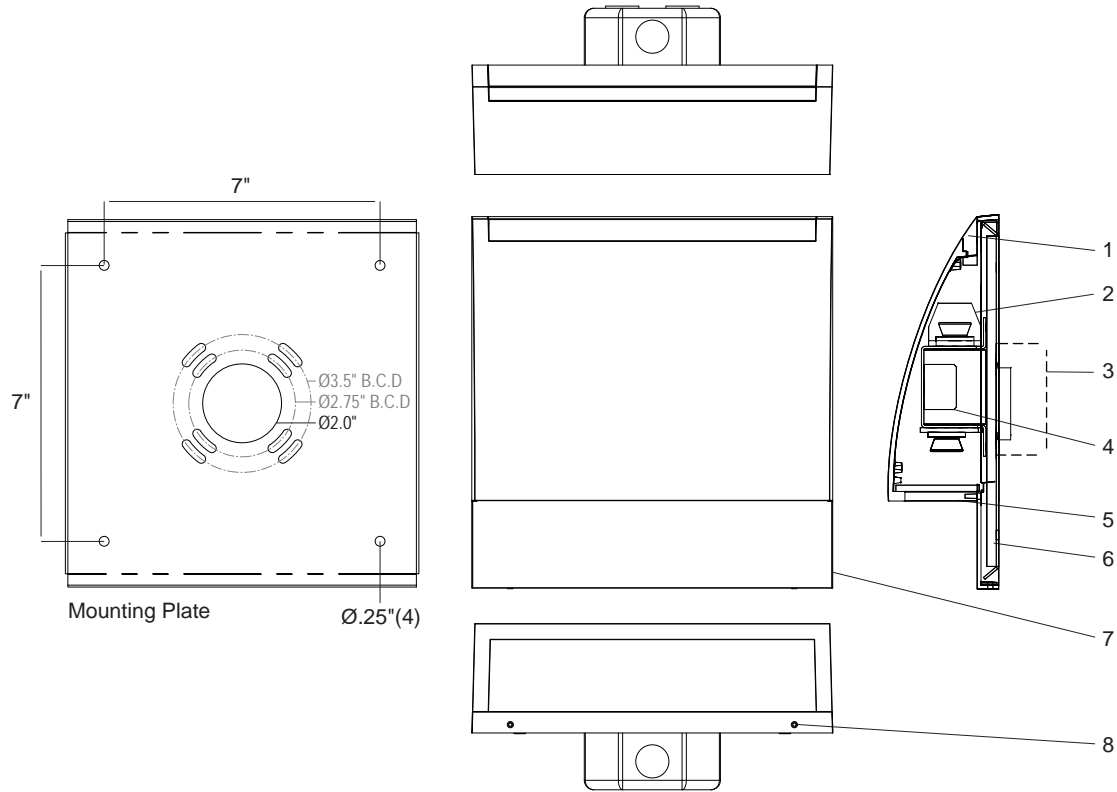

## Streamline Sconce 6030DLED Detailed Product Description

- |   |   |   |                             |
|---|---|---|-----------------------------|
| 1 | Acrylic Light Reveal                    | 5 | Prismatic Glass Lens        |
| 2 | LED Module                              | 6 | Mounting Plate              |
| 3 | 4" Octagonal J-Box Recessed (By Others) | 7 | Housing - Die Cast Aluminum |
| 4 | Driver - Constant Current               | 8 | Stainless Steel Set Screws  |

### Detailed Module Description

#### **Rebelle Architectural Lighting**

Light output (lumens)	_____	390
Watts	_____	7.2
Luminaire Efficacy Rating	_____	54
Color accuracy (CRI)	_____	82
Correlated color temperature (CCT)	_____	4000K

#### Lumen Multipliers

4000K	- 1.00
3500K	- 0.967
3000K	- 0.938