

## CYL-003 7600LED Indirect Streetscape Post Top - Asymmetric Distribution EXTERIOR

MODEL	LED	COLOR TEMPERATURE		VOLT	OPTIONS		COLOUR			
7600LED	60L	60 watts 5055 lumens*	40*	4000K	120*	DIM	dimming (0-10 volt)		WT	white texture
		50L	50 watts 4000 lumens*	35	3500K	208	SP	surge protector 20kV		BT
	40L		40 watts 3000 lumens*	30	3000K	240			SM	silver metallic
						277			AN	aluminum natural
					347 <sup>1</sup>			BZ	bronze	
								GM	gunmetal	
								WS	white satin	
								BM	black matte	
								RAL	specify no.	


\*Standard configuration unless otherwise specified

<sup>1</sup>Consult factory <sup>2</sup>Delivered

SAMPLE CATALOG NUMBER: 7600LED - 60L - 40 - 120 - WT

Using this catalog number would order 1 model 7600LED indirect asymmetric post top with a single 60 watt LED COB module with a color temperature of 4000K wired to a 120 volt, painted white texture polyester powder coat. Poles supplied separately.

CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p><b>Materials</b> Shade: One piece, marine grade cast aluminum. Reflector: White powder coated, aluminum. Arms: Brushed stainless steel tube. Housing: Die formed aluminum. Reflector: Embossed, specular high reflectance aluminum. Lens: IP65 rated silicone optic. Pole fitter: One piece, marine grade, cast aluminum.</p> <p><b>Electrical Components</b> Integral Driver, IP66 rated, Input surge protection: 4kV line-line, 6kV line-earth.</p>	<p>The 7600LED is designed to mount to a 4" overall diameter pole or tenon. Tenon to be 4" long or more. Six 1/4 - 20 stainless steel set screws are provided.</p>	<p>Directional LED module with a large IP65 rated silicone optic. Light is redirected asymmetrically by the high gloss white polyester powder coat reflector on the under side of the decorative shade. B1-U4-G3</p>	<p>The 7600LED is listed for use in wet locations to UL and CSA standards. Windloading EPA = 3.73 sq. ft.</p>

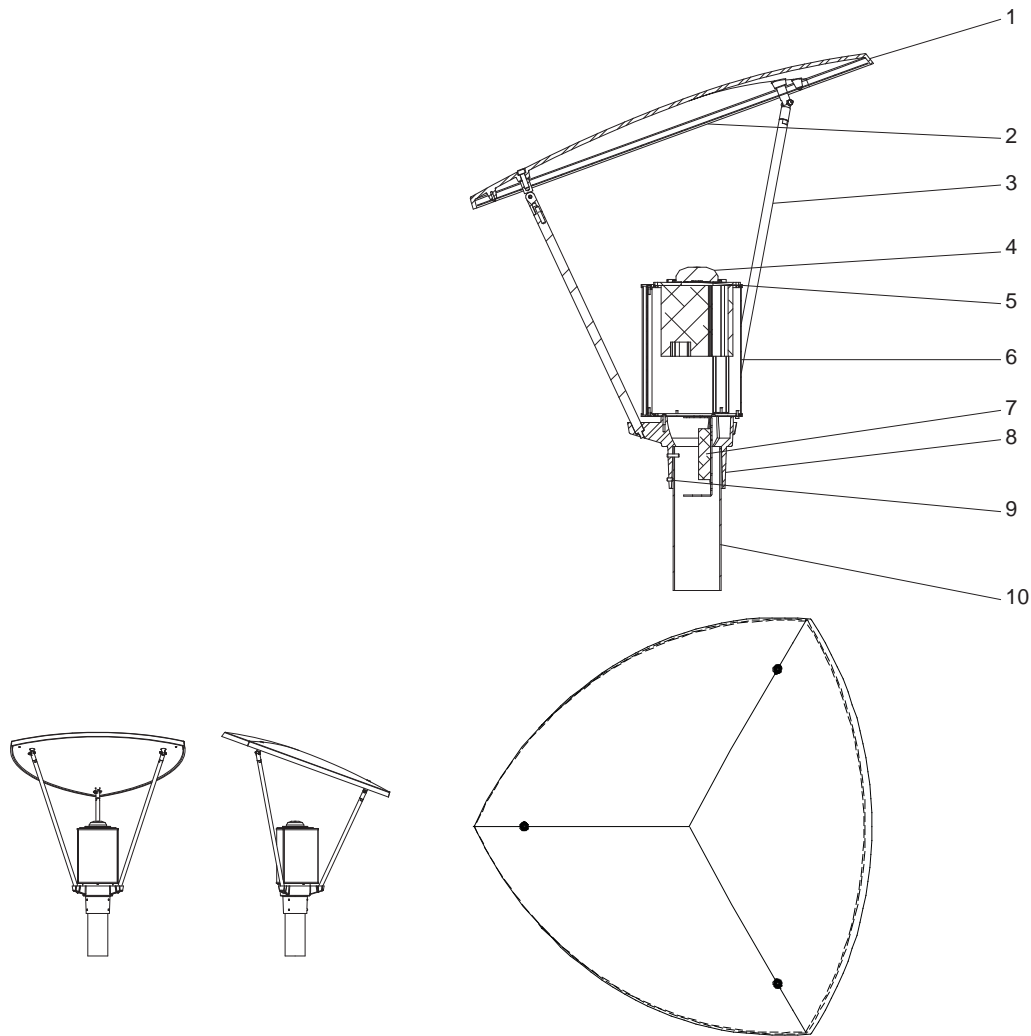

## CYL-003 7600LED Detailed Product Description

- |   |   |    |  |
|---|---|----|--|
| 1 | Shade - One Piece Marine Grade Cast Aluminum  | 6  | Triangular Cylinder Housing - .064" Aluminum       |
| 2 | Reflector - High Gloss White Powder Coated Aluminum   | 7  | Integral Driver                                    |
| 3 | Arms - (3) #4 Brushed Finish 3/4" Diameter Stainless Steel Bar with Aluminum Universal Mount Hinges | 8  | Pole Fitter - One Piece Marine Grade Cast Aluminum |
| 4 | IP65 Rated Silicone Optic   | 9  | Six 1/4 - 20 Stainless Steel Set Screws            |
| 5 | Chip-On-Board LED   | 10 | Pole (Not Included - Order Separately) Ø4.0"       |