

Sightlines 1185LED Maxi Step/Path Low Level Area Light

EXTERIOR


MODEL	LED	COLOR TEMPERATURE	VOLT	OPTIONS	COLOR
1185	15L	40* 4000K	120*	DIM <i>dimming driver 0 - 10 volts</i>	WT <i>white texture</i>
	7L	30 3000K	208	EM <i>emergency battery</i>	BT <i>black texture</i>
			240		SM <i>silver metallic</i>
			277		AN <i>aluminum natural</i>
					BZ <i>bronze</i>
					GM <i>gunmetal</i>
					WS <i>white satin</i>
					BM <i>black matte</i>
					RAL <i>specify no.</i>

*Standard configuration unless otherwise specified ¹ Source lumens

SAMPLE CATALOG NUMBER: 1185 - 15L - 40 - 120 - WT

Using this catalog number would order 1 model 1185 low level area light with 40 x 0.28 watt LEDs at 4000K wired to 120 volts with standard bottom mount junction box with 1/2 NPT threads and a faceplate painted with white texture.

CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p>Materials Faceplate: Cast aluminum. Housing: .064" aluminum protected with high gloss white polyester powder coat. Lens: Tempered, sealed prismatic (#73) glass. Junction box: Gasketed, die cast aluminum, bottom mounted (field adjustable to rear mount), suitable for through branch circuit conductors, suitable for 90°C. (3) - 1/2 NPT plugs, neoprene rubber gaskets.</p> <p>Electrical components Constants current driver, 450mA (15L), 500mA (7L). LED boards 80 CRI.</p>	<p>The Sightlines 1185LED series is designed for concrete pour installations and hollow wall construction. Units are non IC rated so the insulation, if any, must be kept 3" away from the housing and the housing should have 1/2" clearance all around except at the mounting points/surface. See Installation Instructions on the Rebelle website for further details. Conduits must be sealed against water entry into the fixture housing as outlined in the National Electric Code.</p>	<p>The Sightlines 1185LED series is a large scale recessed pathway light. Mounting heights vary but 3' to 4' from grade is normal. LED boards are recessed in the faceplate with integral louvers shielding the source.</p>	<p>The Sightlines 1185LED series is listed for use in wet locations within four feet of the ground to CSA and UL standards. Conduit must be sealed to exclude water from entering the housing.</p>

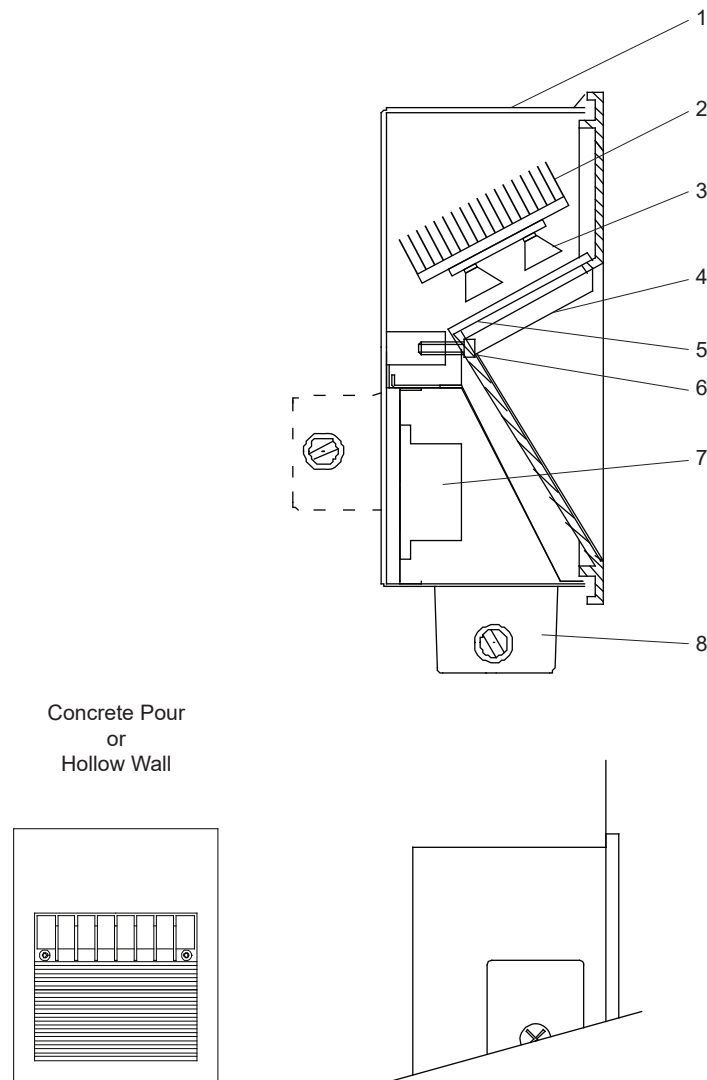

Sightlines 1185LED Detailed Product Description

- | | |
|---|--|
| <p>1 Housing .064" Aluminum Protected with White Polyester Powder Coat</p> <p>2 Heatsink</p> <p>3 LED Modules</p> <p>4 Cast Aluminum Louvered, Gasketed Faceplate</p> | <p>5 Tempered and Sealed Prismatic Glass Lens</p> <p>6 (2) 1/4 - 20 Stainless Steel Hex Socket Cap Screws - Captive</p> <p>7 Driver - Constant Current, IP66</p> <p>8 Junction Box - Suitable for 4 No. 12 AWG Through Branch Circuit Conductors Suitable for 90°C.
(3) - 1/2 NPT Plugs, Neoprene Rubber Gaskets, Bottom Mount Standard (Field Adjustable to Rear Mount)</p> |
|---|--|