

Sightlines 1573LED Maxi Step/Path Low Level Area Light

EXTERIOR

MODEL	LED		COLOR TEMPERATURE		VOLT	FACEPLATE		OPTIONS		COLOR
1573	15L	40 x 0.28 watts 1580 lumens¹	40*	4000K	120*	LV*	louvered	DIM	dimming driver 0 - 10 volts	WT white texture
	7L	20 x 0.30 watts 825 lumens¹	30	3000K	208	PR	open			BT black texture
					240				SM silver metallic	
					277				AN aluminum natural	
									BZ bronze	
									GM gunmetal	
									WS white satin	
									BM black matte	
									RAL specify no.	

*Standard configuration unless otherwise specified




¹ Source lumens

SAMPLE CATALOG NUMBER: 1573 - 15L - 40 - 120 - LV - WT

Using this catalog number would order 1 model 1573 low level area light with 40 x 0.28 watt LEDs with a color temperature of 4000K wired to 120 volts and a louvered faceplate painted with white texture.

CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p>Materials Faceplate: Cast aluminum. Housing: .064" aluminum protected with high gloss white polyester powder coat. Lens: Tempered, sealed prismatic glass. Junction box: Gasketed, die cast aluminum, bottom mounted (field adjustable to rear mount) suitable for through branch circuit conductors, suitable for 90°C. (3) - 1/2 NPT plugs, neoprene rubber gaskets.</p> <p>Electrical components LED driver constant current, 460mA (15L) or 550mA (7L). LED boards >82CRI.</p>	<p>The Sightlines 1573LED series is designed for concrete pour installations and hollow wall construction in compact fluorescent versions. Units are non IC rated so the insulation, if any, must be kept 3" away from the housing and the housing should have 1/2" clearance all around except at the mounting points/surface. See Installation Instructions on the Rebelle website for further details. Conduits must be sealed against water entry into the fixture housing as outlined in the National Electric Code.</p>	<p>The 1573LED units are designed to be mounted within 1' to 2' feet of the ground or floor level. The faceplate is provided in a louvered style to eliminate glare and provide illumination on paths, aisles and stairs. An open face with a prismatic glass lens is available for areas that require higher intensity levels. The reflector system is sealed against the ingress of water and other contaminants.</p>	<p>The Sightlines 1573LED series is listed for usage in wet locations within four feet of the ground to CSA and UL standards. Conduit must be sealed to exclude water from entering the housing.</p>

Concrete Pour & Hollow
Wall Applications

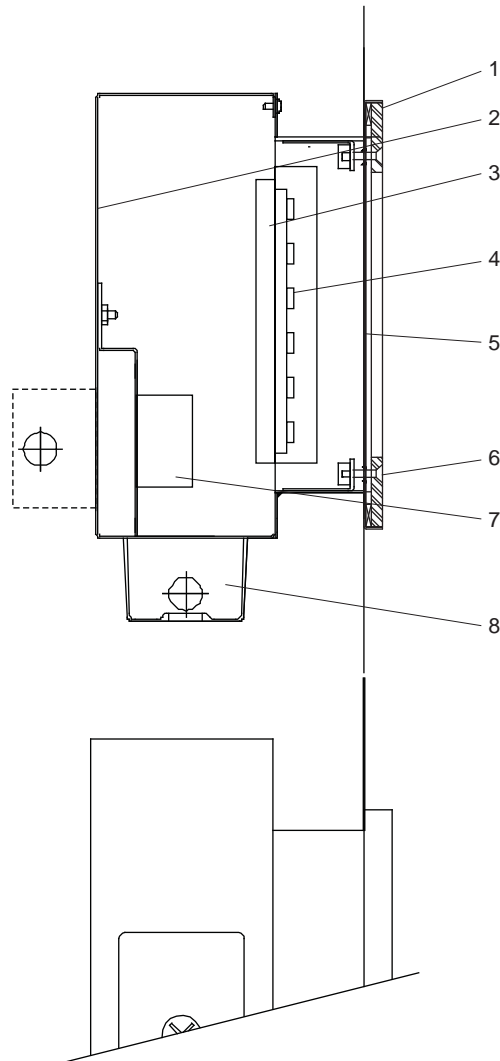

Sightlines 1573LED Detailed Product Description

- | | |
|---|--|
| <p>1 Gasketed Faceplate - Cast Aluminum</p> <p>2 Housing .064" Aluminum Protected with White Polyester Powder Coat</p> <p>3 Thermal Heat Sink Panel</p> <p>4 LED Module</p> <p>5 Tempered and Sealed Prismatic Glass Lens</p> | <p>6 (4) #10 - 24 Flat HD Cap Screws - Stainless</p> <p>7 LED Driver - Constant Current IP66</p> <p>8 Junction Box - Suitable for 4 No. 12 AWG Through Branch Circuit Conductors Suitable for 90°C.
(3) - 1/2 NPT Plugs, Neoprene Rubber Gaskets, Bottom Mount Standard (Back mount is field adjustable)</p> |
|---|--|