

Sightlines 1645VLED Midi Step/Path Low Level Area Light EXTERIOR


MODEL	LED	COLOR TEMPERATURE	VOLT	FACEPLATE	OPTIONS	COLOUR
1645V	15L	40 x 0.28 watts 1580 lumens ¹	40* 4000K	120*	LV* <i>louvered</i>	FS <i>fuse kit</i>
			30 3000K	208	PR <i>open</i>	DIM <i>dimming driver (0-10 volt)</i>
	7L	20 x 0.30 watts 825 lumens ¹		240		
				277		
						WT <i>white texture</i>
						BT <i>black texture</i>
						SM <i>silver metallic</i>
						AN <i>aluminum natural</i>
						BZ <i>bronze</i>
						GM <i>gunmetal</i>
						WS <i>white satin</i>
						BM <i>black matte</i>
						RAL <i>specify no.</i>

*Standard configuration unless otherwise specified ¹Source lumens




SAMPLE CATALOG NUMBER: 1645V - 15L - 40 - 120 - LV - WT

Using this catalog number would order 1 model 1645V low level area light with 40 X 0.28 watt LEDs with a color temperature of 4000K wired to 120 volts with a louvered faceplate painted with white texture polyester powder coat.

CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p>Materials Faceplate: Cast aluminum. Housing: .064" aluminum protected with high gloss white polyester powder coat. Reflector: High gloss white, formed aluminum. Lens: Tempered, sealed prismatic glass or prismatic polycarbonate. Suitable for through branch circuit conductors suitable for 90°C. (2) - 1/2 NPT plugs neoprene rubber gaskets.</p> <p>Driver: Constant current, 460 mA (15L) or 500mA (7L). LED boards >82 CRI.</p>	<p>The Sightlines 1645VLED series is designed for concrete pour installations or hollow wall construction. Units are non IC rated so the insulation, if any, must be kept 3" away from the housing and the housing should have 1/2" clearance all around except at the mounting points/surface. See Installation Instructions on the Rebelle website for further details. Conduits must be sealed against water entry into the fixture housing as outlined in the National Electric Code.</p>	<p>The Sightlines 1645VLED features a vertical orientation louvered or open faceplate. Reflector is high gloss white polyester powder coat. The reflector system is sealed against the ingress of water and other contaminants.</p>	<p>The Sightlines 1645VLED series is listed for use in wet locations within four feet of the ground to CSA and UL standards. Conduit must be sealed to exclude water from entering the housing.</p>

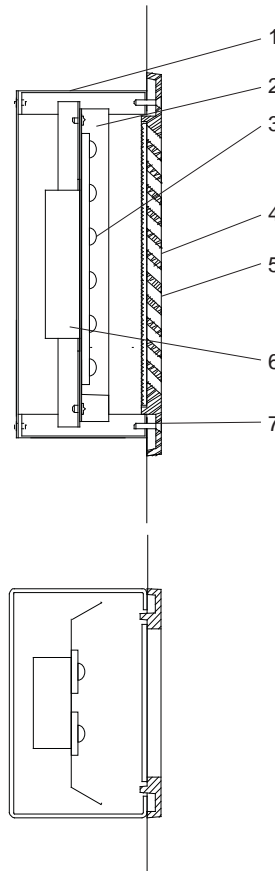

Concrete Pour & Hollow
Wall Applications



Sightlines 1645VLED Detailed Product Description

- | | |
|--|--|
| <p>1 Housing .064" Aluminum Protected with White Polyester Powder Coat</p> <p>2 Reflector - High Gloss White - .036" Thick</p> <p>3 LED Light Engine</p> <p>4 Cast Aluminum, Gasketed Face Plate</p> | <p>5 Sealed Prismatic Polycarbonate Lens - .125" Thick or Prismatic Tempered Glass Lens "PR" Option</p> <p>6 Driver - Constant Current IP66</p> <p>7 (4) Stainless Steel, Cap Screws - Captive</p> |
|--|--|