

Sightlines Sentry 2868U Unlit Bollard

EXTERIOR

HEAVY .250" THICK COLD ROLLED STEEL SHAFT AND CAST ALUMINUM CONSTRUCTION


MODEL	HEIGHT	OPTIONS	COLOR
2868U	42" *	BMT <i>barricade mounting tenon</i>	WT <i>white texture</i>
	36"	REM <i>removable construction</i>	BT <i>black texture</i>
	30"		SM <i>silver metallic</i>
			AN <i>aluminum natural</i>
			BZ <i>bronze</i>
			GM <i>gunmetal</i>
			WS <i>white satin</i>
			BM <i>black matte</i>
			RAL <i>specify no.</i>

**Standard configuration unless otherwise specified*


SAMPLE CATALOG NUMBER: 2868U - 42" - BT

Using this catalog number would order 1 model 2868U unlit bollard with a 42" height, painted with black texture polyester powder coat. Anchor bolt set is provided.

CONSTRUCTION	MOUNTING	OPTIONS
<p>Materials</p> <p>Cast aluminum (.188" wall) marine grade top cap. Shaft: .250" thick cold rolled steel seamless tube.</p> <p>Anchorage: See page 2 for details.</p>	<p>The 2868U unlit bollard is designed to attach to a poured concrete foundation (by others) using anchor bolts, template and hardware provided. Standard mounting locks shaft to a cast aluminum base plate.</p>	<p>Vandal resisting mount is provided by an optional internally fastened tenon assembly (BMT). Optional removable construction is also available, when the bollard is removed the inground mounting hardware is flush with grade (REM).</p>

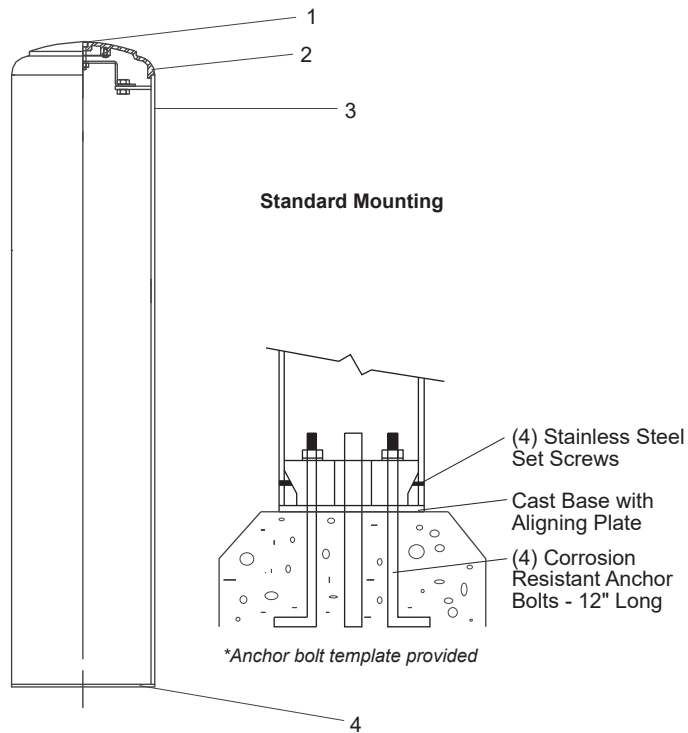

Removable Construction
Flush with grade when bollard removed.

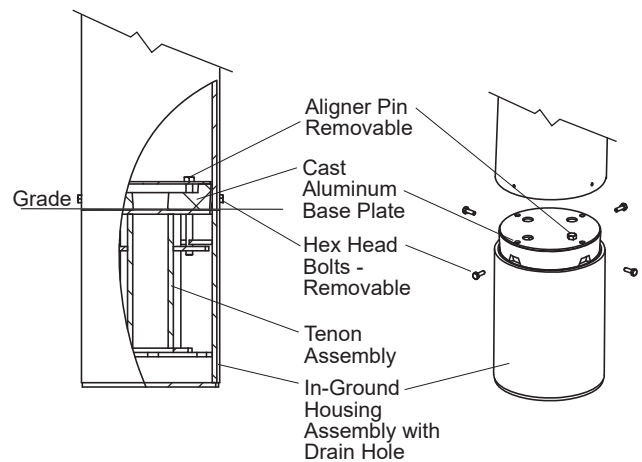


Sightlines Sentry™ 2868U Detailed Product Description

- 1 5/16 - 18 S/S Cap HD Screw with Seal Washer
- 2 Top Casting - Aluminum
- 3 Ø8" .250" Thick Steel Shaft
- 4 Cast Aluminum Base Plate with (4) Ø1/2 Anchor Bolts

MOUNTING DETAILS

Barricade Mount - 'BMT'

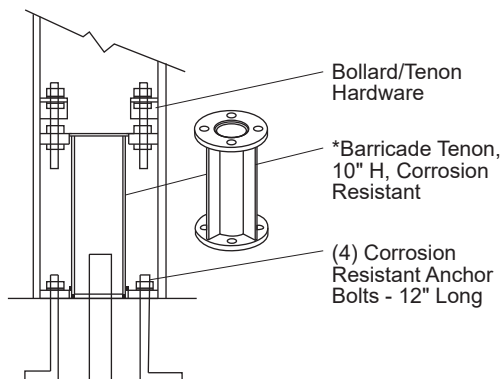

Removable Version - 'REM' Installation Example

