




Luminaire shown with optional accent plate

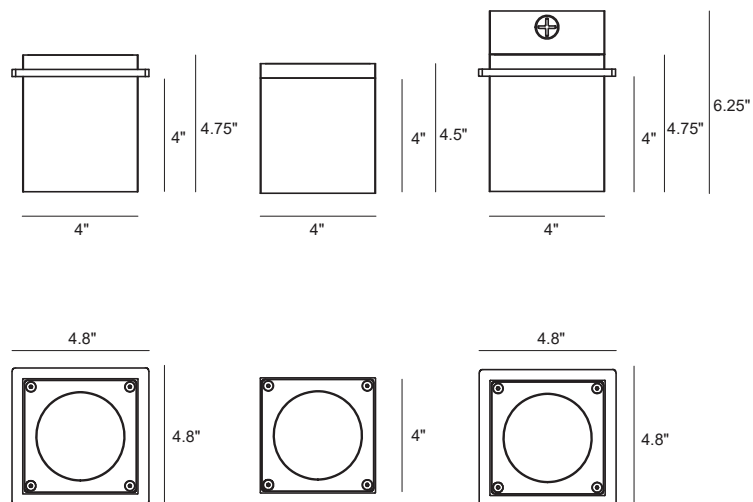

Shown with optional
accent plate

Shown with optional
accent plate

Tessera 3121LED Turtle Friendly Surface Ceiling Mount

INTERIOR/EXTERIOR

MODEL	LED MODULE		COLOR TEMPERATURE		VOLT	DISTRIBUTION		OPTIONS		COLOR	
3121	10L	10 watts ¹ 887 lumens ²	AM	amber LED turtle friendly 585-595nm	120*	SP	19° spot	1()	painted accent plate, specify finish, std. paint to match	WT	white texture
					208	FL	30° flood			BT	black texture
	7L	7 watts ¹ 633 lumens ²			240			3	stainless steel accent plate	SM	silver metallic
					277			CV	cut off visor	AN	aluminum natural
								SC	surface wiring conduit feed canopy	BZ	bronze
									surface wiring canopy	GM	gunmetal
								SC1		WS	white satin
								CP(_")	ceiling plate (specify 6, 8 or 10")	BM	black matte
										RAL	specify no.

*Standard configuration unless otherwise specified ¹Nominal LED Power ²Source lumens



SAMPLE CATALOG NUMBER: 3121 - 10L - AM - 120 - SP - 1 - WT

Using this catalog number would order 1 model 3121 ceiling mount luminaire using spot optics and a 10 watt amber LED module wired to 120 volts with a decorative accent plate painted to match the luminaire in white texture polyester powder coat.


CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p>Materials All aluminum construction, stainless steel tamper resistant hardware, acrylic lens.</p> <p>Electrical Components Constant current driver 350mA or 250mA, -30°C starting temperature.</p>	<p>The 3121LED series is designed for ceiling mounting. The LED driver is integrally fixed to a mounting plate and designed to fit into a 4" octagon j-box (by others). The LED driver supplied with the fixture uses 4.5 cubic inches of J-Box volume. A suitable J-Box example is 15 cubic inch capacity Iberville 54151 (not included). Optional surface wiring canopy suitable for 1/2" conduit feed or surface wiring canopy (no j-box required). Optional ceiling plate available to cover mounting surface, 6, 8 or 10" square. For outdoor applications silicone seal is required. Maximum fixture weight is 4 lbs.</p>	<p>The 3121LED luminaire uses a precision molded lens to direct the light, either spot or flood distributions are available. Luminaire comes standard with a honeycomb louver.</p>	<p>The 3121LED series is listed for use in wet locations to UL and CSA Standards, covered ceiling mount only. L70 (minimum) >50,000 hours. IP65 rated.</p>




Wildlife Lighting
Certification Number 2018-040

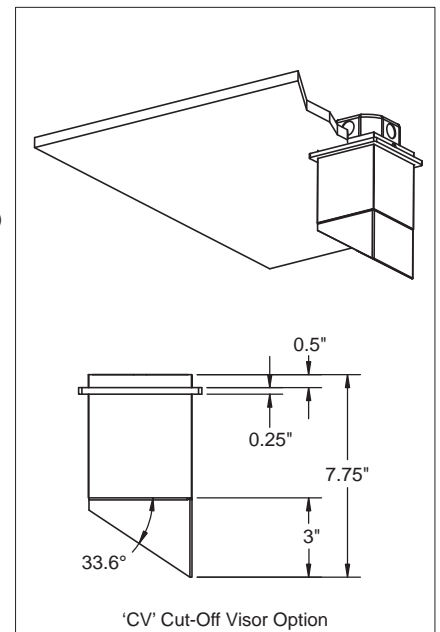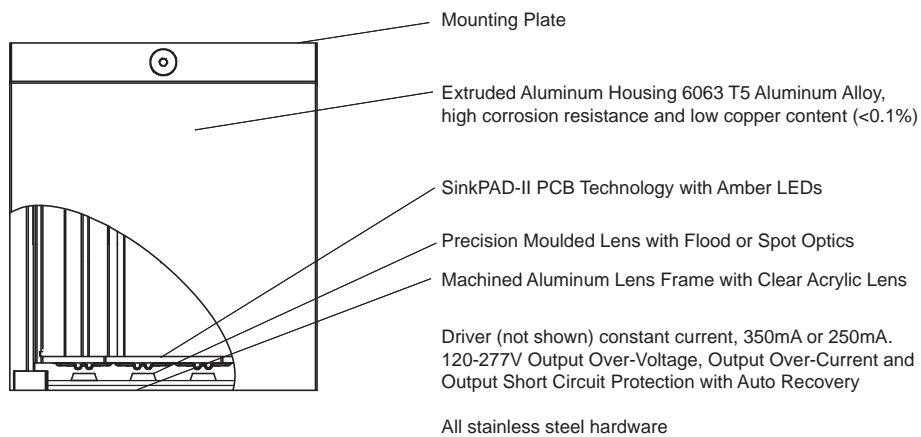

Tessera 3121LED Turtle Friendly Ceiling Mount

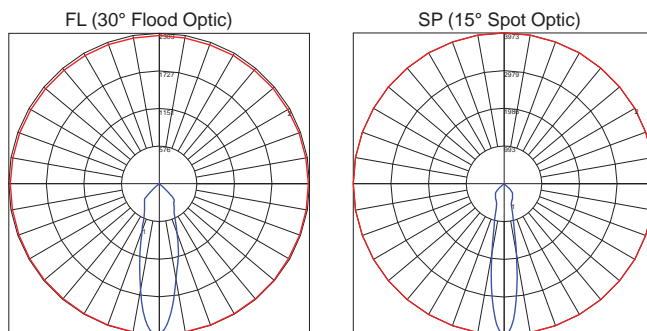

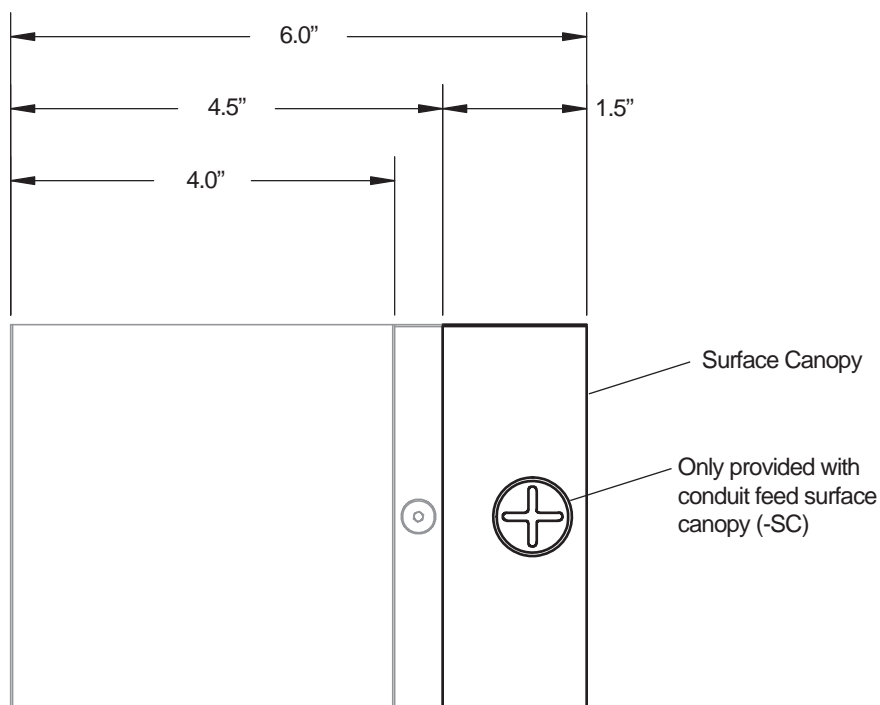

Tessera Surface Canopy Option (For Use with 3100, 3101, 3103, 3121)

