

# Saturna 4007x2LED Maxi Post Arm Twin Streetscape Shepherd's Hook EXTERIOR


MODEL	LED	COLOR TEMPERATURE	VOLT	LENS	COLOUR
4007x2	2x16L <small>LED module 2x16 watt</small>	40* <small>4000K 2x1700 lumens<sup>1</sup></small>	120*	RF* <i>frost</i>	WT <i>white texture</i>
			208		BT <i>black texture</i>
			240		SM <i>silver metallic</i>
			277		AN <i>aluminum natural</i>
			347		BZ <i>bronze</i>
					GM <i>gunmetal</i>
					WS <i>white satin</i>
					BM <i>black matte</i>
					RAL <i>specify no.</i>

\*Standard configuration unless otherwise specified <sup>1</sup>Delivered lumens (4000K, 80 CRI)

SAMPLE CATALOG NUMBER: 4007x2 - 2x16L - 40 - 120 - RF - WT

Using this catalog number would order 1 model 4007x2 twin post arm luminaire with two 16 watt, 4000K, 1700 lumen light engines wired to 120 volts, with frosted globes and painted white texture. Poles are supplied separately.

CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p>Materials</p> <p>Housing: Cast aluminum. Gasket: EPDM rubber. Strut assembly: Aluminum sheet, keyholed removal. Reflector disks: Aluminum sheet. Lens/diffuser: Threaded, tempered glass. Shepherd's hook arm: Aluminum tube. Post top slip fitter: 4.5" aluminum tube.</p> <p>LED Components</p> <p>Driver: Constant current, 450mA. Light engine: Chip-on-Board 13mm LES, Zhaga Book 3 Compliant Socket.</p>	<p>The Saturna 4007x2 luminaire incorporates a 4.5" diameter ballast housing that slips over a 4.0" diameter pole. The assembly is locked onto the pole with three 1/4 - 20 socket set screws. The electrical tray is removable and the wiring is connected to the internal pole wiring that is supplied by others.</p>	<p>The 4007x2 series is a Type V distribution, non-cut-off classified product. The frosted glass diffuser softens the light. Strut and disk assembly shields light source. Top reflector disk controls upward light.</p>	<p>The Saturna maxi twin post arm luminaire is listed for use in wet locations to UL and CSA Standards. Windloading EPA = 2.5 sq. ft. LED life: 50,000 hours minimum, L70 @ 25°C.</p>

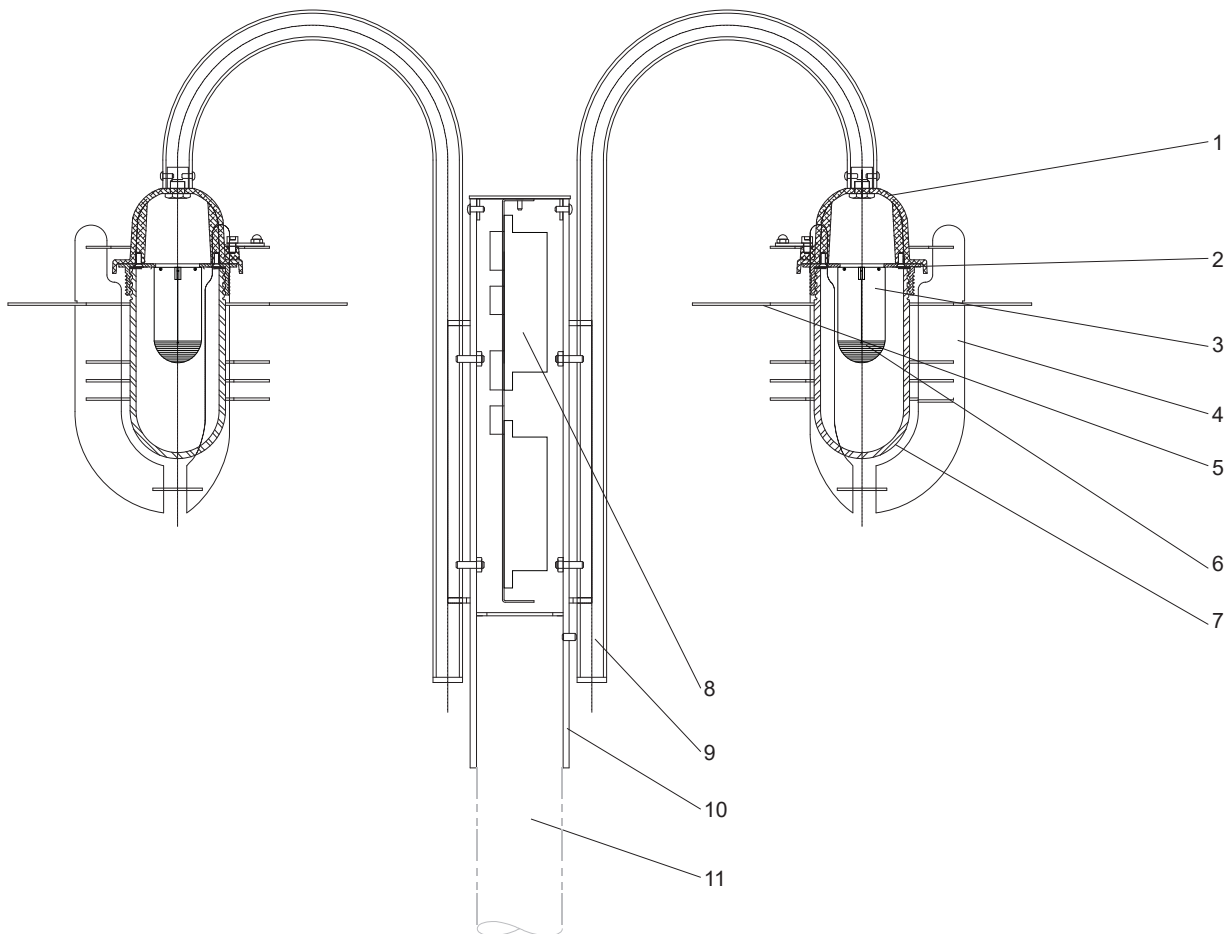

## Saturna 4007x2LED

### Detailed Product Description

- |   |   |    |  |
|---|---|----|--|
| 1 | Housing - Cast Aluminum                               | 7  | Lens/Diffuser - Frosted Glass Threaded - Tempered    |
| 2 | Gasket - E.P.D.M Rubber                               | 8  | Driver, 450mA, 120-277 Volt Input                    |
| 3 | Heatsink  | 9  | Shepherd's Hook Arm 1 5/8" x 1/8" Wall Aluminum Tube |
| 4 | Strut Assembly - Keyholed Removal .125" Aluminum      | 10 | Post Top Slip Fitter 4.5" Aluminum Tube              |
| 5 | Reflector Disks - .125" Aluminum                      | 11 | Pole (Not Included - Order Separately) Ø4.0"         |
| 6 | Chip-on-Board 13mm LES, Zhaga Book 3 Compliant Socket |    |  |