

Streamline 6001LED

Midi Indirect Wall Mount

INTERIOR/EXTERIOR




MODEL	WATTS	COLOR TEMPERATURE	VOLT	OPTIONS	COLOR
6001	134L <i>1 x 134 watts</i> <i>10500 lumens¹</i>	3K <i>3000K</i>	120*	WL <i>wet location</i>	WT <i>white texture</i>
		35K <i>3500K</i>	208	CV <i>cut off visor for downward tilt</i>	BT <i>black texture</i>
	101L <i>1 x 101 watts</i> <i>7900 lumens¹</i>	4K <i>4000K</i>	240	DIM <i>dimming driver 0 - 10V control</i>	SM <i>silver metallic</i>
		5K <i>5000K</i>	277	NAT <i>natatorium construction</i>	AN <i>aluminum natural</i>
					BZ <i>bronze</i>
					GM <i>gunmetal</i>
					WS <i>white satin</i>
					BM <i>black matte</i>
					RAL <i>specify no.</i>

*Standard configuration unless otherwise specified ¹Delivered lumens (4000K)


SAMPLE CATALOG NUMBER: 6001 - 134L - 4K - 120 - WT

Using this catalog number would order 1 model 6001LED midi indirect wall mount luminaire with 134 watt, 4000K light engine wired to 120 volts, painted white texture polyester powder coat.

CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p>Materials</p> <p>Adjustable lamp housing: Cast aluminum. Driver enclosure: Cast aluminum with top cover plate. Glass frame: Cast aluminum. Lens: Clear, tempered glass.</p> <p>Electrical Components</p> <p>Light engine: Aluminum core PCB each with 4 LEDs and Ledil Strata - SQ optics.</p> <p>Driver: High efficiency, <20% THD, >90% PF</p>	<p>The 6001LED series is designed for wall mounting over a 4" octagonal j-box. A heavy gauge mounting plate attaches to the wall surface. Head hooks on to the mounting plate and locks in place with two stainless steel set screws.</p> <p>Maximum fixture weight 32 lbs.</p>	<p>The 6001LED optical system is optimized to provide an asymmetric indirect distribution. Head is adjustable (+/- 15°) to customize aiming upon installation, if required.</p>	<p>The 6001LED is listed for use in dry/damp locations to UL and CSA standards. Optional 'wet location' labelled unit can be provided as an option. (LOC 4 > 4 FEET)</p> <p>All units have a protective, tempered, glass shield to protect the LED compartment. The wet location units are totally sealed for wet location usage. (IP65)</p> <p>LEDs are rated for 50,000 hour life with lumen maintenance > 70% (L70).</p>

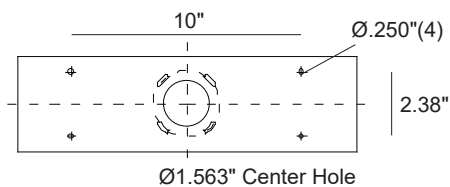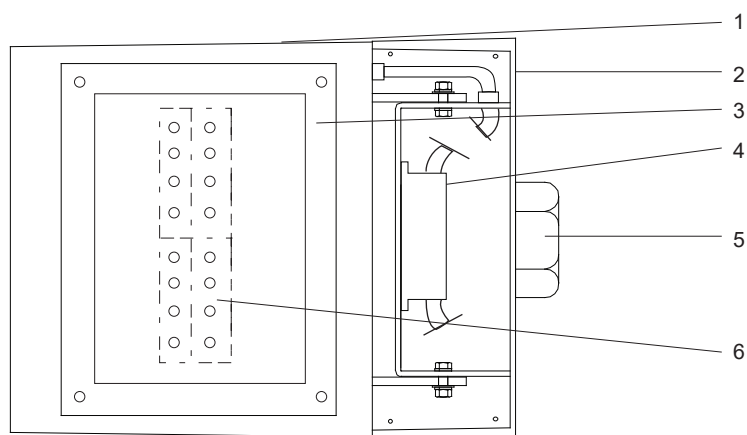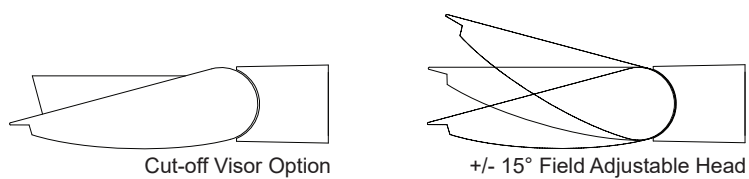

Mounting Plate

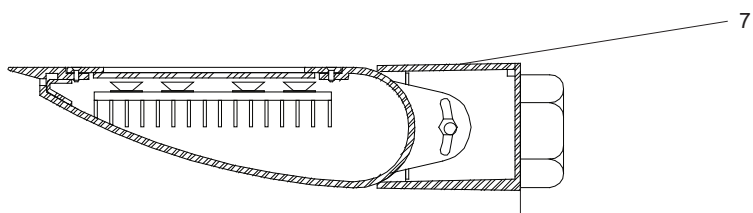

Streamline Indirect 6001LED

Detailed Product Description

- | | | | |
|---|---|---|---------------------------------------|
| 1 | Adjustable Lamp Housing (+/-15°) - Cast Aluminum | 5 | Recessed 4" Octagon J-Box (By Others) |
| 2 | Driver Enclosure - Cast Aluminum with Top Cover Plate | 6 | LED Boards 4 x LEDs Each |
| 3 | Enclosed LED Glass Frame and Heat Sink Assembly | 7 | Housing Assembly |
| 4 | Driver | | |