

Streamline 6005LED Maxi Direct Wall Mount

EXTERIOR


MODEL	WATTS		COLOR TEMPERATURE		VOLT	DISTRIBUTION		OPTIONS		COLOR	
6005	200L	1 x 200 watts 15000 lumens¹	3K	3000K	120*	T2	type II distribution	DIM	0 - 10 volt dimmable driver	WT	white texture
			35K	3500K	208	T3	type III distribution			BT	black texture
	167L	1 x 167 watts 12500 lumens¹	4K	4000K	240	T4	type IV distribution			SM	silver metallic
			5K	5000K	277					AN	aluminum natural
	134L	1 x 134 watts 10000 lumens¹								BZ	bronze
										GM	gunmetal
										WS	white satin
										BM	black matte
										RAL	specify no.

*Standard configuration unless otherwise specified ¹Delivered lumens (4000K)

SAMPLE CATALOG NUMBER: 6005 - 200L - 4K - 120 - T2 - WT

Using this catalog number would order 1 model 6005LED maxi direct wall mount luminaire with 200 watt, 4000K light engine wired to 120 volts, with a type II distribution, painted white texture polyester powder coat.

CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p>Materials Adjustable lamp housing: Cast aluminum. Driver enclosure: Cast aluminum with top cover plate. Light engine enclosure: Cast aluminum sealed to lens frame. Lens: Clear tempered glass in cast aluminum gasketed frame.</p> <p>Electrical Components Light engine: Aluminum core PCB each with 4 LEDs and Ledil Strata - SQ optics. Driver: High efficiency, <20% THD, >90% PF</p>	<p>The 6005LED series is designed for wall mounting over a 4" octagonal recessed j-box. Wall must have sufficient strength to support luminaire. A heavy gauge mounting plate attaches to the wall surface. Head hooks on to plate and locks in place with two stainless steel set screws. Silicone seal is required along top of driver compartment and down sides to keep moisture from entering driver compartment. Maximum fixture weight 63 lbs.</p>	<p>The 6005LED optical system is type II, III or IV with a full cutoff classification.</p>	<p>The 6005LED is listed for use in wet locations to UL and CSA standards.</p> <p>LEDs are rated for 50,000 hour life with lumen maintenance > 70% (L70).</p>

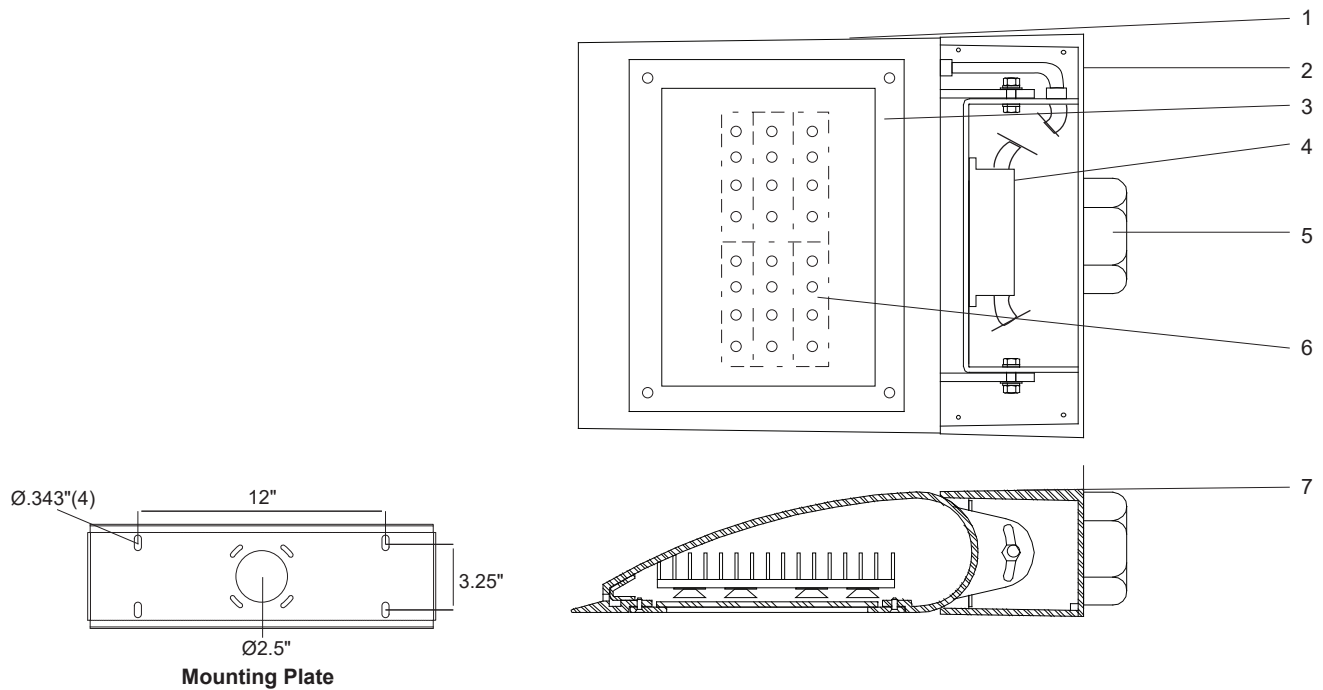

Streamline Direct 6005LED

Detailed Product Description

- | | | | |
|---|---|---|---------------------------------------|
| 1 | Adjustable Lamp Housing (+/-15°) - Cast Aluminum | 5 | Recessed 4" Octagon J-Box (By Others) |
| 2 | Driver Enclosure - Cast Aluminum with Top Cover Plate | 6 | LED Boards 4 x LEDs Each |
| 3 | Enclosed LED Glass Frame and Heat Sink Assembly | 7 | Housing Assembly |
| 4 | Driver | | |