

Streamline 6009LED Mini Indirect Ceiling Wash

INTERIOR/EXTERIOR


| MODEL | WATTS | COLOR TEMPERATURE | VOLT | OPTIONS | COLOR |
|-------|---|-------------------|------|---|----------------------------|
| 6009 | 32L <i>1 x 32 watts 2500 lumens¹</i> | 3K <i>3000K</i> | 120* | WL <i>wet location</i> | WT <i>white texture</i> |
| | | 35K <i>3500K</i> | 208 | CV <i>cut off visor for downward tilt</i> | BT <i>black texture</i> |
| | | 4K <i>4000K</i> | 240 | DIM <i>dimming driver 0 - 10V control</i> | SM <i>silver metallic</i> |
| | | 5K <i>5000K</i> | 277 | DF <i>micro-diffusion film</i> | AN <i>aluminum natural</i> |
| | | | | | BZ <i>bronze</i> |
| | | | | | GM <i>gunmetal</i> |
| | | | | | WS <i>white satin</i> |
| | | | | | BM <i>black matte</i> |
| | | | | | RAL <i>specify no.</i> |

*Standard configuration unless otherwise specified ¹Delivered lumens (4000K)

SAMPLE CATALOG NUMBER: 6009 - 32L - 4K - 120 - WT

Using this catalog number would order 1 model 6009 mini indirect ceiling wash luminaire with a 32 watt, 4000K light engine wired to 120 volts, painted white texture polyester powder coat.

| CONSTRUCTION | MOUNTING | OPTICAL | PROTECTION |
|---|--|---|--|
| <p>Materials</p> <p>Adjustable lamp housing: Cast aluminum. Driver enclosure: Cast aluminum with top cover plate. Lens: Solite, tempered glass in captive frame.</p> <p>Electrical Components</p> <p>Light engine: Aluminum core PCB each with 4 LEDs and Ledil Strata - SQ optics.</p> <p>Driver: High efficiency, <20% THD, >90% PF</p> | <p>The 6009LED series is designed for wall mounting over a recessed FS junction box which is located parallel to the luminaire back on the center line. The luminaire mounting plate is secured to the mounting surface outside of the FS box location and the luminaire is hooked on the plate and secured with set screws on the bottom. The supply wires are connected to the luminaire leads and contained in the FS box cavity.</p> <p>Maximum fixture weight 15 lbs.</p> | <p>The 6009LED optical system is optimized to provide an asymmetric indirect distribution. Head is adjustable (+/- 15°) to customize aiming upon installation, if required.</p> | <p>The 6009LED is normally provided for indoor dry or damp locations to UL and CSA standards but, if ordered, can be made suitable for wet locations to UL and CSA standards. (LOC 4 > 4 FEET)</p> <p>All units have a protective tempered glass cover and are completely gasketed to exclude any contaminants.</p> <p>LEDs are rated for 50,000 hour life with lumen maintenance > 70% (L70).</p> |

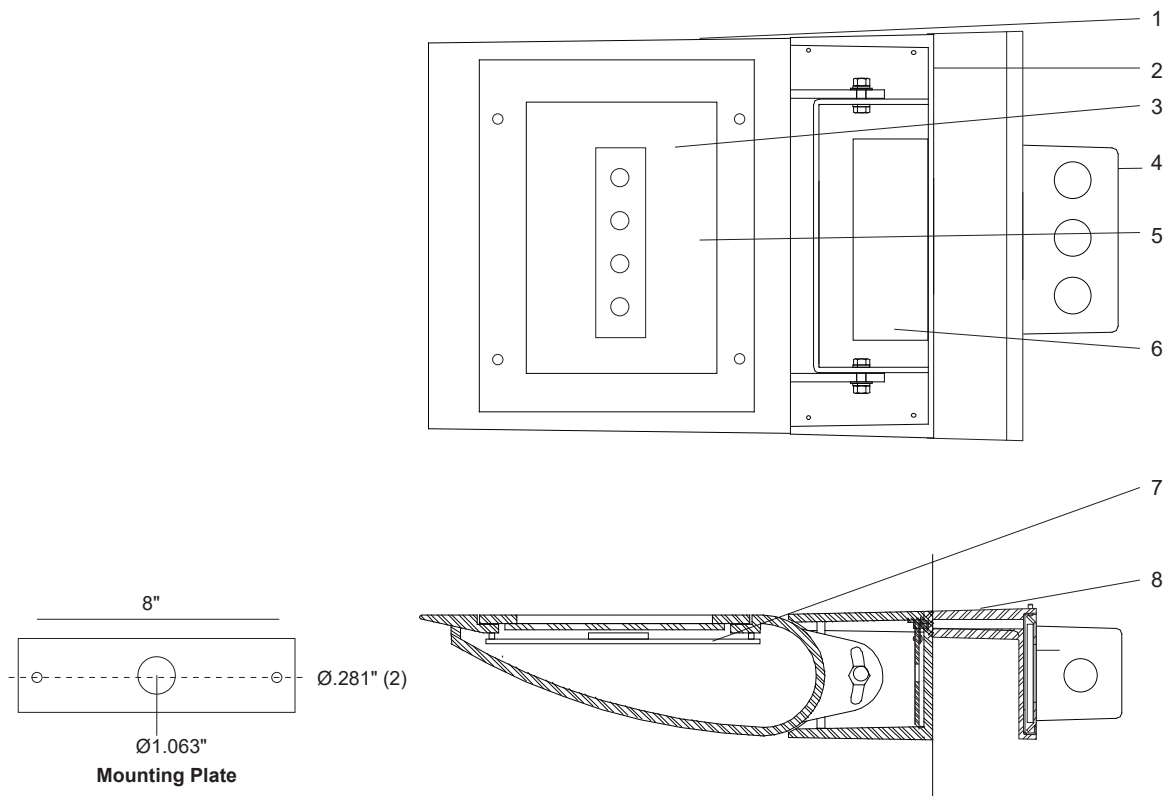

Streamline Indirect 6009LED Detailed Product Description

- | | | | |
|---|--|---|---|
| 1 | Adjustable Housing (+/-15°) - Cast Aluminum | 5 | Glass - Solite, Tempered 5/32" Thick in Captive Frame |
| 2 | Driver Enclosure - Cast Aluminum with Top Cover Plate | 6 | Driver, High Efficiency <20% THD, >90% PF |
| 3 | Light Engine, 4 x LEDs with Optics | 7 | Heatsink Plate |
| 4 | FS Box 2" x 4" Rectangle (By Others) Mount Horizontally | 8 | Cantilever Support Arm - Cast Aluminum |