

Note: Sign panel by others.
Sign mounting kit by Rebelle

Streamline 6030DSLED

Mini Wall Mount Downlight Signage Illuminator INTERIOR


| MODEL | LED | COLOR TEMPERATURE | VOLT | OPTIONS | COLOR |
|--------|-----|-------------------|------|--------------------------------------|---------------------|
| 6030DS | 7L | 30 3000K | 120* | WL wet location listing | WT white texture |
| | | 35 3500K | 277 | DIM dimming driver (0-10v) | BT black texture |
| | | 40 4000K | | DL downlight only (4.8w, 353 lumens) | SM silver metallic |
| | | | | | AN aluminum natural |
| | | | | | BZ bronze |
| | | | | | GM gunmetal |
| | | | | | WS white satin |
| | | | | | BM black matte |
| | | | | | RAL specify no. |

*Standard configuration unless otherwise specified +delivered (353 lumens down/37 lumens up, 4000K)

SAMPLE CATALOG NUMBER: 6030DSLED - 7L - 30 - 120 - WT

Using this catalog number would order 1 model 6030DS mini wall mount sconce with 3 x 2.4 watt LED boards with a color temperature of 3000K wired to 120 volts, painted white texture polyester powder coat.

| CONSTRUCTION | MOUNTING | OPTICAL | PROTECTION |
|---|---|---|---|
| <p>Materials</p> <p>Lamp housing: Pressure die cast aluminum. Light reveal: Frost acrylic. Lens: Prismatic glass.</p> <p>Electrical Components</p> <p>Driver: Constant current 350mA integral driver. LED boards >82CRI.</p> | <p>The 6030DS luminaire is designed to mount over a recessed 4" j-box. A universal mounting plate allows leveling. The unit attaches to a mounting plate that is fixed to the j-box. Two stainless steel set screws lock the luminaire to the mounting plate. Sign mounting kit is supplied to mount in conjunction with the luminaire to provide mounting for sign face. Hardware is supplied.</p> | <p>The 6030DS luminaire is designed to provide even downlight illumination and soft illumination of the uplight reveal strip.</p> | <p>The 6030DS luminaire is listed for use in damp/dry locations to UL and CSA standards. ADA compliant.</p> |

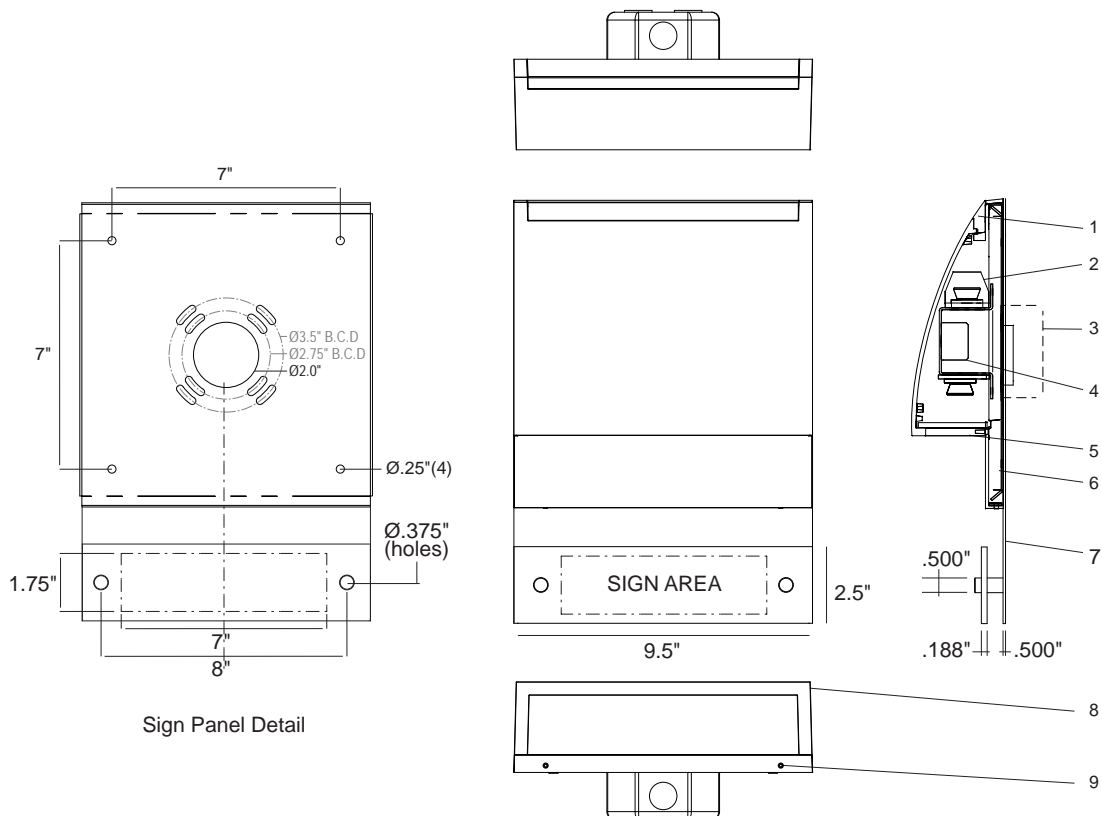

Streamline Sconce 6030DSLED Detailed Product Description

- | | | | |
|---|---|---|--|
| 1 | Acrylic Light Reveal | 6 | Mounting Plate Suitable for mounting over 4" J-Box |
| 2 | LED Module | 7 | Sign Mounting Plate - By Rebelle with Sign Mounting Fittings, Paint to Match |
| 3 | 4" Octagonal J-Box Recessed (By Others) | 8 | Housing - Die Cast Aluminum |
| 4 | Driver - Constant Current | 9 | Stainless Steel Set Screws |
| 5 | Prismatic Glass Lens | | |

Detailed Module Description

Rebelle Architectural Lighting

| | |
|------------------------------------|-------|
| Light output (lumens) | 390 |
| Watts | 7.2 |
| Luminaire Efficacy Rating | 54 |
| Color accuracy (CRI) | 82 |
| Correlated color temperature (CCT) | 4000K |

Lumen Multipliers

| |
|---------------|
| 4000K - 1.00 |
| 3500K - 0.967 |
| 3000K - 0.938 |