

# CYL-003 7010LR LED Light Reveal Feature Wall Up/Down Light INTERIOR/EXTERIOR

MODEL	SINGLE MODULE	COLOR TEMPERATURE	VOLT	OPTICS DOWN	OPTIONS	COLOUR	
7010LR*	1x12L <i>1 x 12W</i> <i>1500 lumens<sup>1,2</sup></i>	40* <i>4000K</i>	120*	SP <i>spot (8°)</i>	DIM <sup>2</sup> <i>dimming driver (0-10 volt)</i>	WT <i>white texture</i>	
		30 <i>3000K</i>	208	FL <i>flood (15°)</i>	90 <sup>2</sup> <i>high CRI</i>	BT <i>black texture</i>	
			240	WFL <i>wide flood (33°)</i>	INV <i>inverted mount</i>	SM <i>silver metallic</i>	
			277	VWFL <i>very wide flood (72°)</i>	EM <i>emergency battery</i>	AN <i>aluminum natural</i>	
				PB <sup>3</sup> <i>pencil beam (8 watts)</i> <i>3000K or 4000K only</i>		BZ <i>bronze</i>	
MODEL	DOUBLE MODULE	COLOR TEMPERATURE	VOLT	OPTICS UP	OPTICS DOWN	OPTIONS	COLOUR
7010LR*	2x12L <i>2 x 12W</i> <i>2 x 1500 lumens<sup>1,2</sup></i>	40* <i>4000K</i>	120*	SP <i>spot (8°)</i>	SP <i>spot (8°)</i>	DIM <sup>2</sup> <i>dimming driver (0-10 volt)</i>	WS <i>white satin</i>
		30 <i>3000K</i>	208	FL <i>flood (15°)</i>	FL <i>flood (15°)</i>	90 <sup>2</sup> <i>high CRI</i>	BM <i>black matte</i>
			240	WFL <i>wide flood (33°)</i>	WFL <i>wide flood (33°)</i>		RAL <i>specify no.</i>
			277	VWFL <i>very wide flood (72°)</i>	VWFL <i>very wide flood</i>	EM <i>emergency battery (down module only)</i>	
				PB <sup>3</sup> <i>pencil beam (8 watts)</i> <i>3000K or 4000K only</i>	PB <sup>3</sup> <i>pencil beam (8 watts)</i> <i>3000K or 4000K only</i>		


\*Standard configuration unless otherwise specified

<sup>1</sup>Delivered (80CRI, 4000K) <sup>2</sup>Not applicable to PB  
<sup>3</sup>Light Reveal uses a 2 watt LED, when specified with dimming option light reveal is not dimmed

SAMPLE CATALOG NUMBER: 7010LR - 2x12L - 40 - 120 - SP/FL - WT

Using this catalog number would order 1 model 7010LR wall mount up/down luminaire, with two 12 watt LED modules with a color temperature of 4000K wired to 120 volts with a spot optic up and flood optic down painted white texture powder coat.

CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p>Materials Housing / ballast arm: Die formed aluminum. Top / bottom plates: Machined aluminum. Lenses: Solite, tempered glass shield. Light reveal: Frosted, machined acrylic.</p> <p>Electrical Components Driver/Power Supply: 350 mA, Luxeon 1204 COB, TE collar with interchangeable optics (excluding pencil beam option). Light Reveal illuminated by a 2 watt (300 source lumen) LED board powered by a 350mA constant current driver.</p>	<p>The 7010LR LED series is designed for wall mounting. A heavy gauge mounting plate is secured to the wall and mounted independently of the recessed 4" octagon j-box (by others). The main housing hooks on to the mounting plate and is secured by two stainless steel set screws. Silicone seal is required to seal across the back of the ballast arm and down the sides to exclude moisture from entering the ballast compartment.</p>	<p>The 7010LR LED uses Chip-on-Board LED modules with Zhaga Book 3 compliant socket and field changeable, high efficiency twist lock reflector. Pencil beam module has a nominal LED power of 8 watts, replaces 12 watt COB module.</p>	<p>The 7010LR LED series is listed for use in wet locations to UL and CSA Standards. L70 minimum at 50,000 hours.</p>

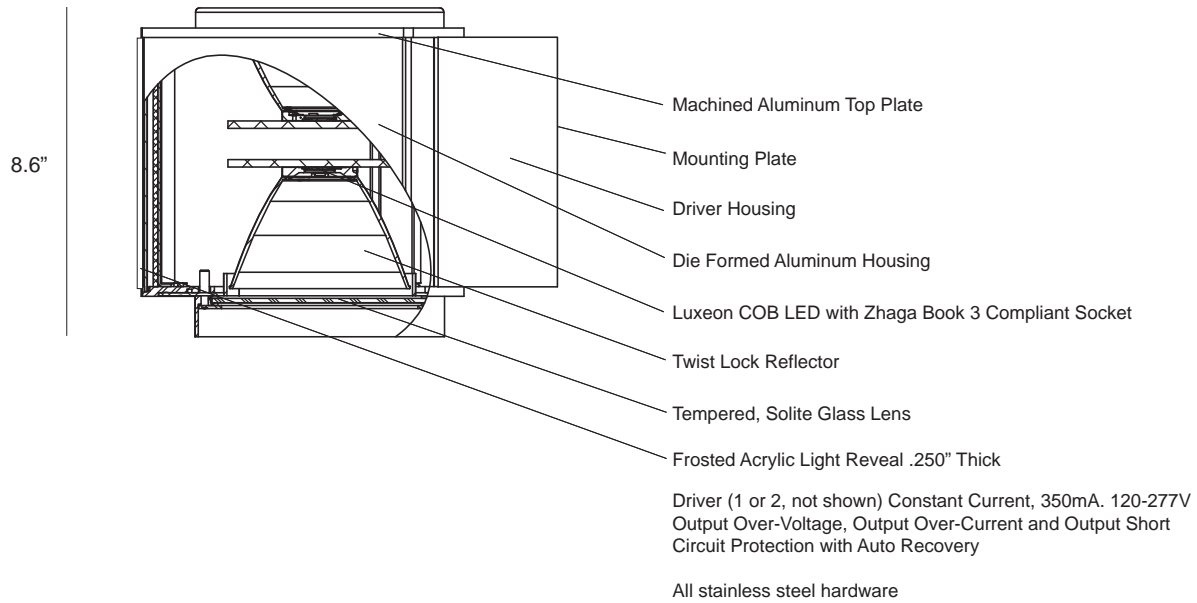


## CYL-003 7010LR LED Detailed Description

### Beam Options

	Beam Type	PB	SP	FL	WFL	VWFL
UP Optic	Beam	Pending	8°	15°	33°	72°
DOWN Optic	Beam	Pending	8°	15°	33°	72°

### Beam Configurations

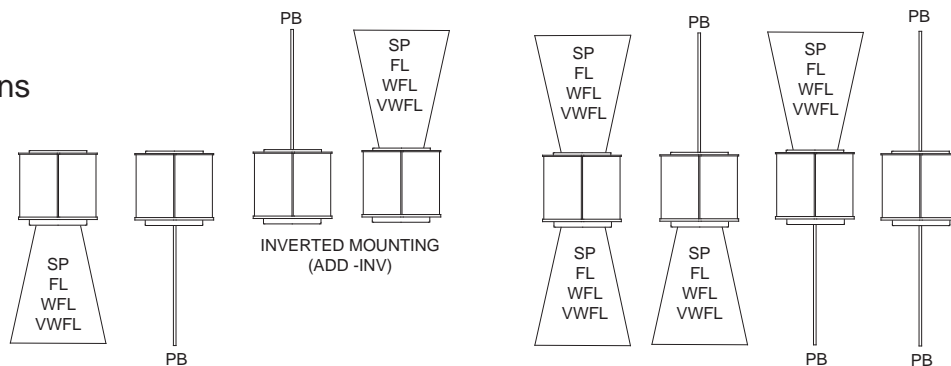

1x12L Single Module Options

2 x 12L Double Module Options