

Encore ENC0 Wall Mount

INTERIOR/EXTERIOR

MODEL	LENGTH	MODULES	WATTS	COLOR TEMPERATURE	VOLT	OPTIC - UP (U)	OPTIC - DOWN (D)	DRIVER LOCATION	OPTIONS	COLOR
ENC0	12"	D double	13L 13 watts ¹ 1535 lumens ²	40*	4000K	120*	SP 20° spot	SP 20° spot	REM remote	WT white texture
	18"	S single ³	9L 9 watts ¹ 1123 lumens ²	35	3500K	208	NF 30° narrow	NF 30° narrow	INT integral	BT black texture
	24"			30	3000K	240	FL 50° flood	FL 50° flood	WP wall plate	SM silver metallic
	30"			27	2700K	277	WF 80° wide	WF 80° wide		AN aluminum natural
										BZ bronze
										GM gunmetal
										WS white satin
										BM black matte
										RAL specify no.


*Standard configuration unless otherwise specified

¹Nominal LED Power ²Delivered (4000K, 80CRI), lumens per module +Remote driver only
³For single module specify whether up (U) or down (D) orientation is required


SAMPLE CATALOG NUMBER: ENC0 - 12" - S - 13L - 40 - 120 - SP(D) - INT - WT

Using this catalog number would order 1 model ENC0 12" wall mount luminaire with a single 13 watt LED module with a spot optic, downlight orientation, a color temperature of 4000K wired to 120 volts, integral driver, painted white texture polyester powder coat.

CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p>Materials</p> <p>All aluminum construction, stainless steel tamper resistant hardware, acrylic lens.</p> <p>Electrical Components</p> <p>Constant current driver 350mA or 250mA, Minimum starting temperature -30°C, COB with Zhaga compliant socket, 80 CRI standard. Optional 0-10V dimming to 1%, consult factory for details.</p>	<p>The ENC0 series is designed for wall mounting over a recessed standard 2"x4" rectangular device/utility box (by others) which is located parallel to the luminaire. The mounting plate is secured directly to the rectangular device/switch box and the luminaire is hooked on the plate and secured with set screws. For mounting over a 4" octagon junction box the wall plate option should be ordered.</p>	<p>The ENC0 luminaire uses Chip-on-Board technology with Zhaga Book 3 compliant socket and high efficiency twist lock optics with clear acrylic lens.</p>	<p>The ENC0 series is listed for use in wet locations to UL and CSA Standards. Reported L70 > 50,000 hours. IP65 rated.</p>

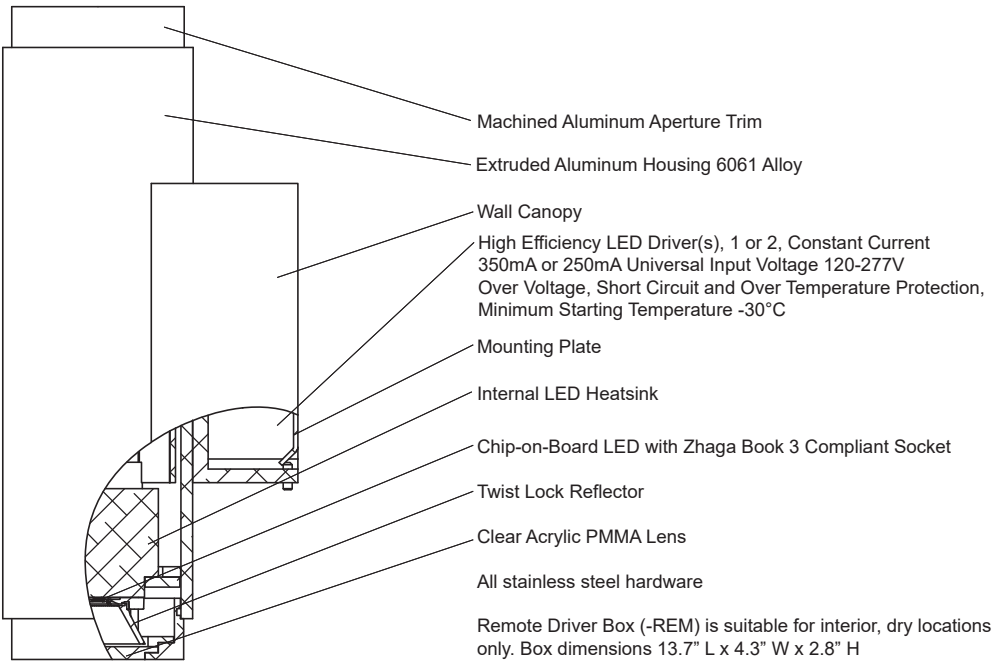

Encore ENC0

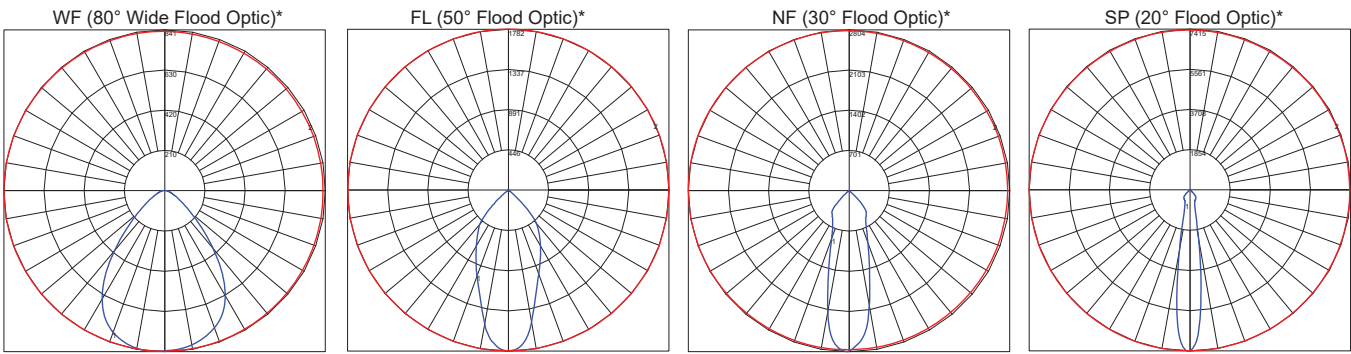

*Based on ENC0-13L

Product	CCT	CRI	Delivered Lumens	Nominal LED Power	System Power	Lumens per Watt*
ENC0-13L	4000	80	1535	13 watts	12.9 watts	118.9
ENC0-9L	4000	80	1123	9 watts	10.7 watts	104.9

*Based on system power