

Tessera 3151LED Turtle Friendly Bollard

EXTERIOR

MODEL	LED MODULE	VOLT	COLOR TEMPERATURE	DISTRIBUTION	OPTIONS	COLOR
3151	1x10L	120*	AM	FL	CV	WT
		208			PC	BT
	1x7L	240			TN	SM
	2x10L	277			BCS	AN
	2x7L				CF	BZ
						GM
						WS
						BM
						RAL

*Standard configuration unless otherwise specified ¹Nominal LED Power ²Source lumens



SAMPLE CATALOG NUMBER: 3151 - 1x10L - AM - 120 - FL - WT

Using this catalog number would order 1 single head model 3151 bollard luminaire with a 10 watt amber LED module, flood optic, wired to 120 volts, painted white texture polyester powder coat.

CONSTRUCTION	MOUNTING	OPTICAL	PROTECTION
<p>Materials All aluminum construction, stainless steel tamper resistant hardware, precision molded lens.</p> <p>Electrical Components Constant current driver 350mA or 250mA, -30°C starting temperature.</p>	<p>The 3151LED series is designed to mount to a concrete base (by others). Anchor bolts are provided in hot dipped galvanized finish for new construction build. For optional retrofit builds, no anchor bolts would be provided and bollard can be mounted with hilti type fasteners (hilti anchors and hardware by others). Base plate is welded to bollard shaft. Base cover is offered as an option. Tenon mount is offered as an option for concealed mounting hardware.</p>	<p>The 3151LED luminaire uses a precision molded lens to direct the light with a flood distribution. The luminaire comes standard with honeycomb louver.</p>	<p>The 3151LED series is listed for use in wet locations to UL and CSA Standards. L70 (minimum) >50,000 hours. IP65 rated optical compartment.</p>



Wildlife Lighting
Certification Number 2018-040

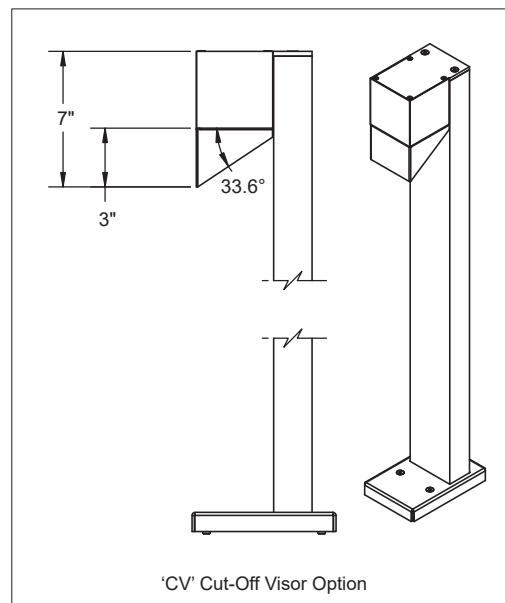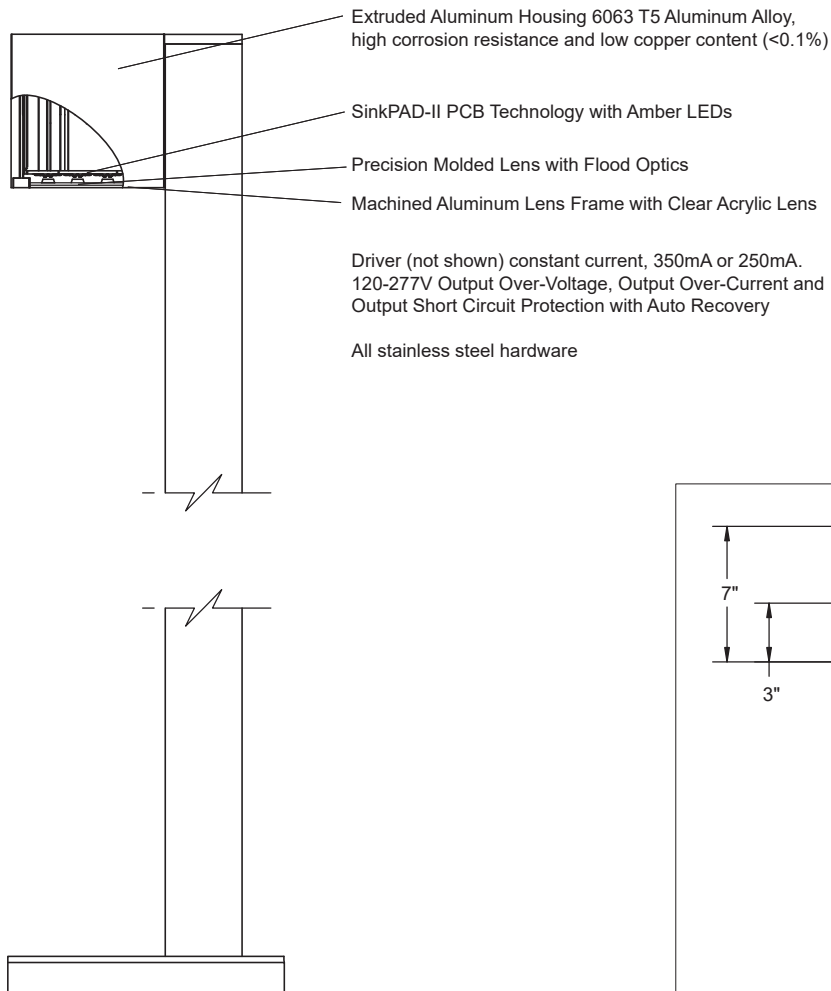

Tessera 3151LED Turtle Friendly Bollard

